
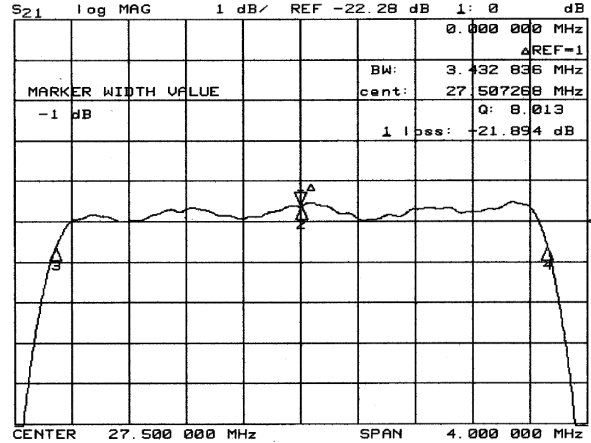



Typical Performance

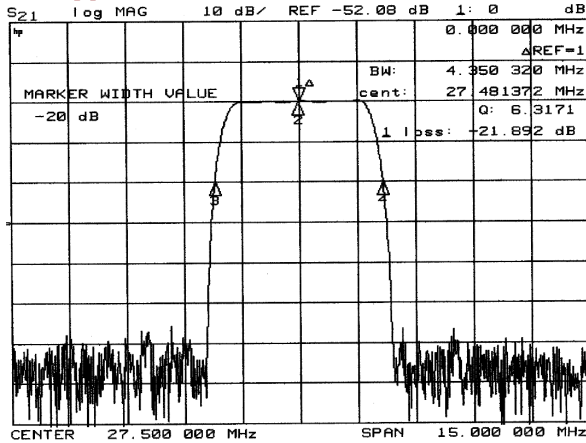

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	27.40	27.50	27.60
Insertion Loss	dB	-	22.0	23.5
1 dB Bandwidth	MHz	3.40	3.43	-
3 dB Bandwidth	MHz	-	-	-
20 dB Bandwidth	MHz	-	4.35	0.50
Passband Ripple	dB	-	0.35	0.50
Group Delay Variation	nsec	-	100	130
Absolute Delay	μsec	-	3.58	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	38		

Package Dimension

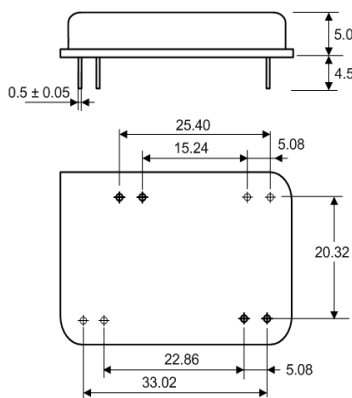

Matching Configuration

