



### Typical Performance

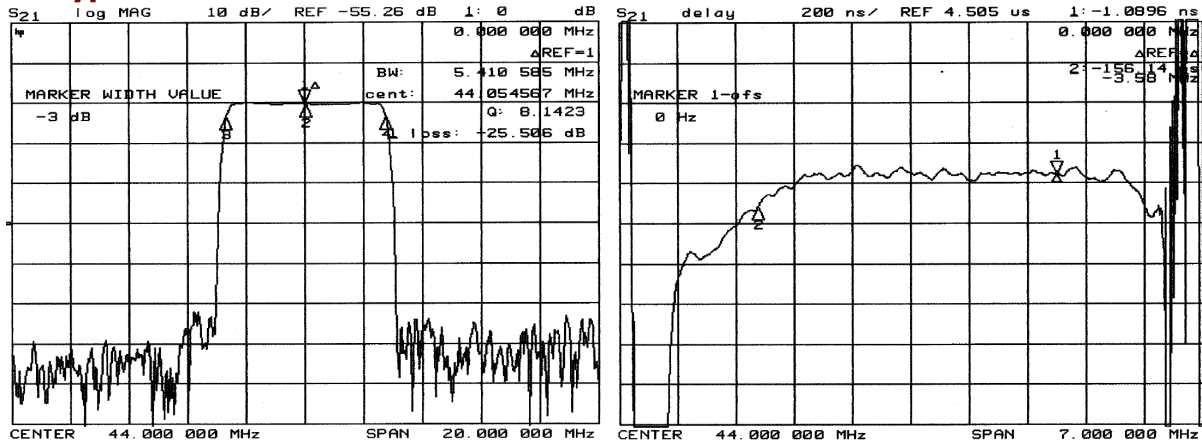

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	44.04	44.00	44.11
Insertion Loss	dB	-	25.5	27.0
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	5.30	5.41	-
40 dB Bandwidth	MHz	-	6.08	-
Passband Ripple	dB	-	0.70	1.00
Group Delay Variation	nsec	-	100	150
Absolute Delay	µsec	-	4.50	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	YZ-LiNbO3		
Temperature Coefficient	ppm/°C	-94		
Package	mm	38		

### Package Dimension

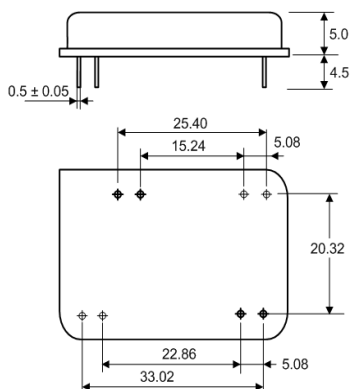

### Matching Configuration

