
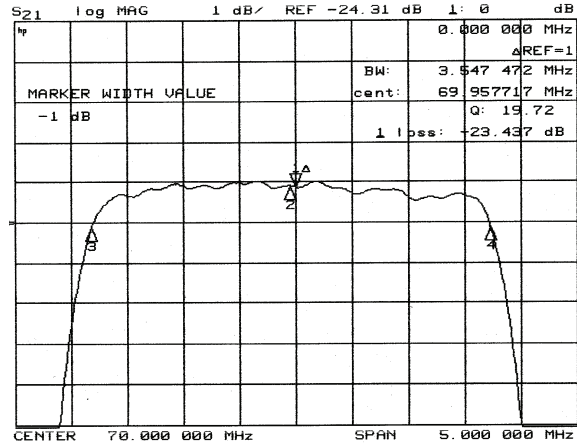



Typical Performance

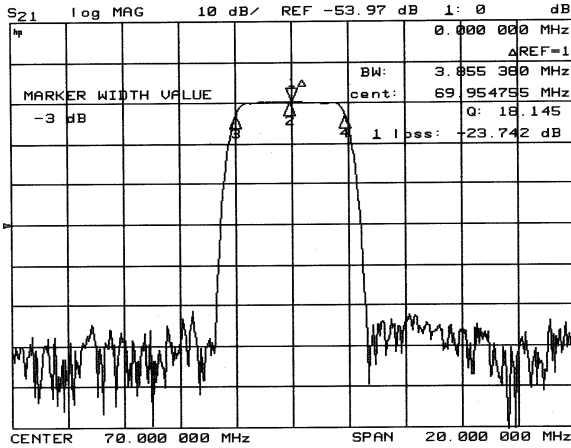

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	23.5	25
1 dB Bandwidth	MHz	3.3	3.55	-
3 dB Bandwidth	MHz	3.8	3.85	-
40 dB Bandwidth	MHz	-	5.13	5.3
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	2.02	-
Ultimate Attenuation	dB	50	55	-
Substrate Material		LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	0		

Package Dimension

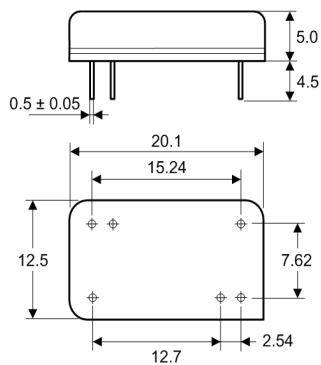

Matching Configuration

