
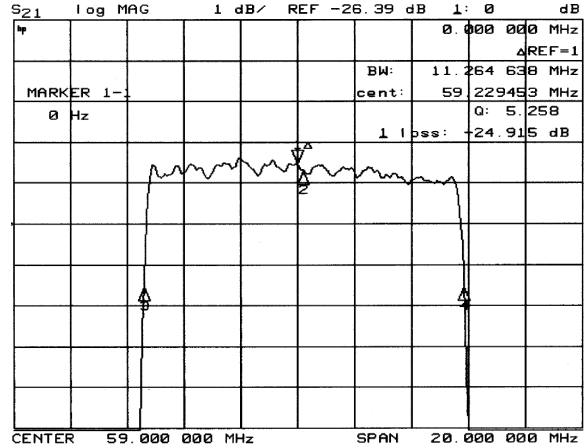



### Typical Performance

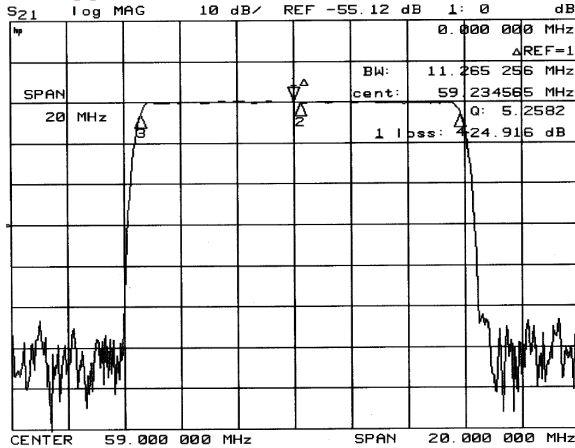


### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	63.20	63.30	63.30
Insertion Loss	dB	-	20.0	22.0
1 dB Bandwidth	MHz	3.50	3.60	-
3 dB Bandwidth	MHz	3.80	3.85	-
40 dB Bandwidth	MHz	-	4.90	5.10
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	200	300
Absolute Delay	µsec	-	3.05	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	YZ-LiNbO3		
Temperature Coefficient	ppm/°C	-94		
Package	mm	35		

### Package Dimension

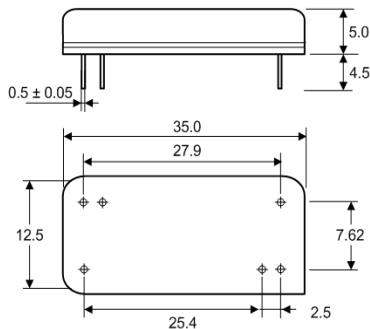

### Matching Configuration

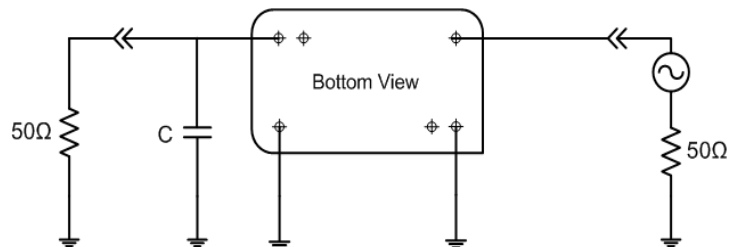

No Matching required  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C