
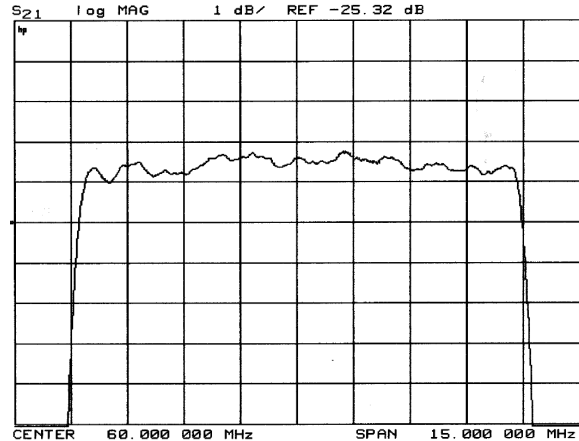



Typical Performance

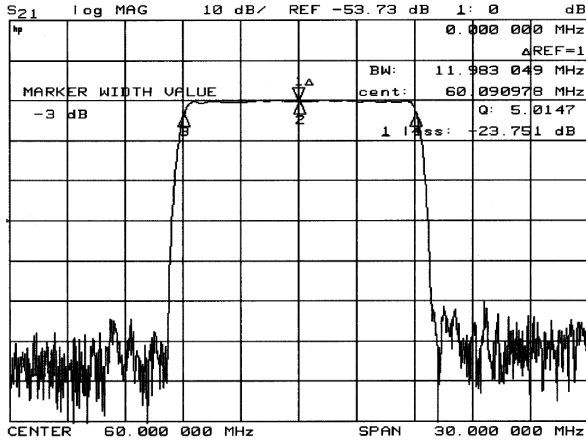

Specification

| Index | Unit | Min | Typical | Max |
|-------------------------|--------|------------|---------|-------|
| Center Frequency | MHz | 59.92 | 60.00 | 60.08 |
| Insertion Loss | dB | - | 23.5 | 25.0 |
| 1 dB Bandwidth | MHz | - | - | - |
| 3 dB Bandwidth | MHz | 11.95 | 12.05 | - |
| 40 dB Bandwidth | MHz | - | 13.45 | 13.60 |
| Passband Ripple | dB | - | 0.75 | 1.00 |
| Group Delay Variation | nsec | - | 80 | 150 |
| Absolute Delay | μsec | - | 2.15 | - |
| Ultimate Rejection | dB | 50 | 55 | - |
| Substrate Material | - | 128-LiNbO3 | | |
| Temperature Coefficient | ppm/°C | -72 | | |
| Package | mm | 20 | | |

Package Dimension

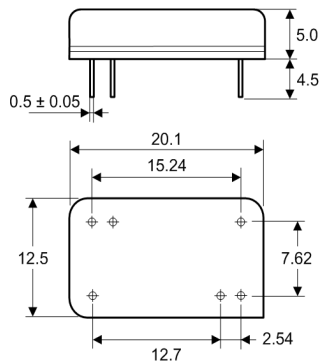

Matching Configuration

