
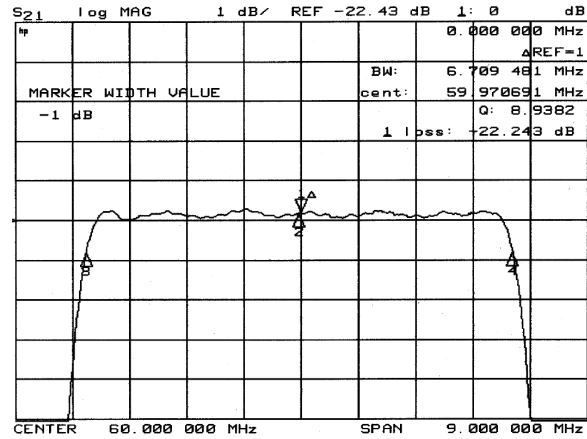



Typical Performance

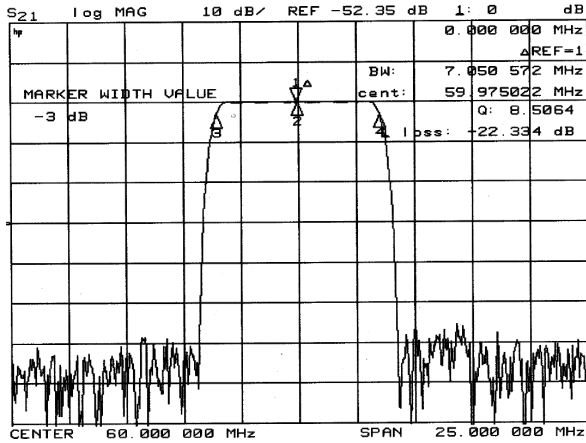

Specification

| Index | Unit | Min | Typical | Max |
|-------------------------|--------|-----------|---------|-------|
| Center Frequency | MHz | 59.92 | 60.00 | 60.08 |
| Insertion Loss | dB | - | 22.5 | 24.0 |
| 1 dB Bandwidth | MHz | - | - | - |
| 3 dB Bandwidth | MHz | 6.90 | 7.05 | - |
| 40 dB Bandwidth | MHz | - | 8.35 | 8.50 |
| Passband Ripple | dB | - | 0.45 | 0.80 |
| Group Delay Variation | nsec | - | 80 | 150 |
| Absolute Delay | µsec | - | 2.40 | - |
| Ultimate Rejection | dB | 50 | 60 | - |
| Substrate Material | - | YZ-LiNbO3 | | |
| Temperature Coefficient | ppm/°C | -94 | | |
| Package | mm | 20 | | |

Package Dimension

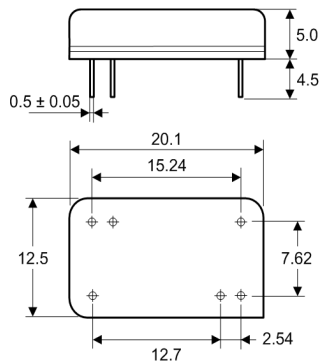

Matching Configuration

