
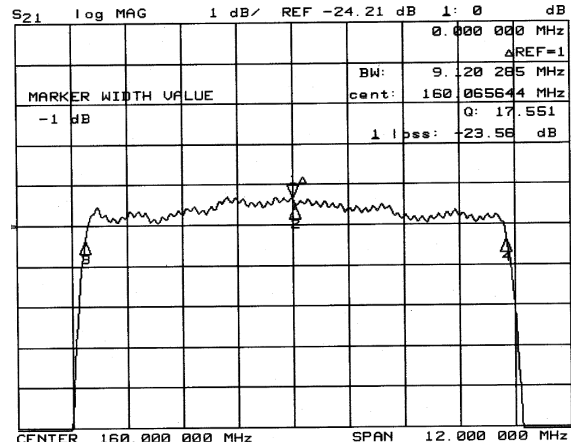



### Typical Performance

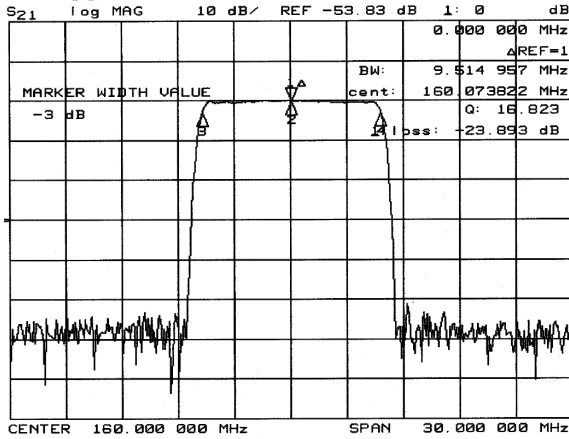

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	159.85	160.00	160.15
Insertion Loss	dB	-	23.5	25.0
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	9.40	9.50	-
40 dB Bandwidth	MHz	-	10.85	11.00
Passband Ripple	dB	-	0.70	1.00
Group Delay Variation	nsec	-	70	120
Absolute Delay	μsec	-	2.87	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

### Package Dimension

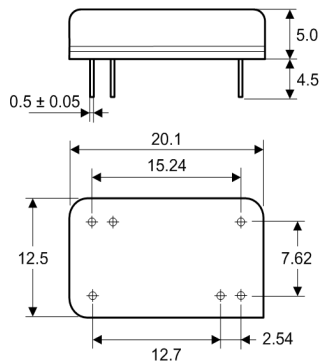

### Matching Configuration

