
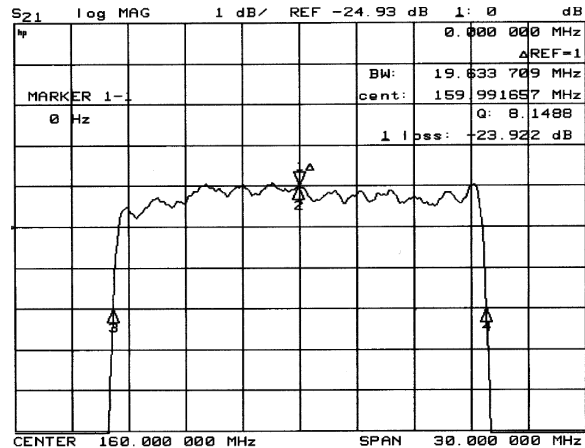



Typical Performance

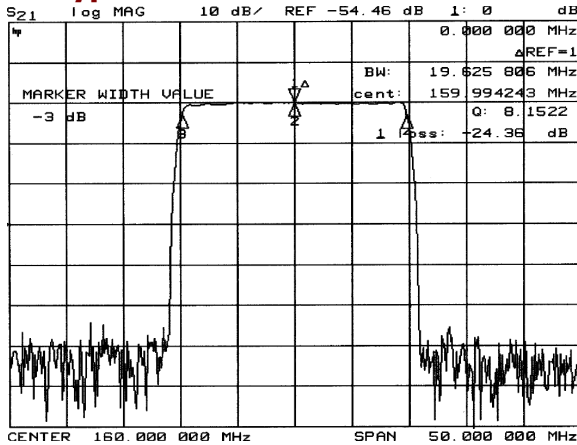

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	159.80	160.00	160.20
Insertion Loss	dB	-	24.0	25.5
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	19.50	19.63	-
40 dB Bandwidth	MHz	-	21.65	21.80
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	µsec	-	1.56	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

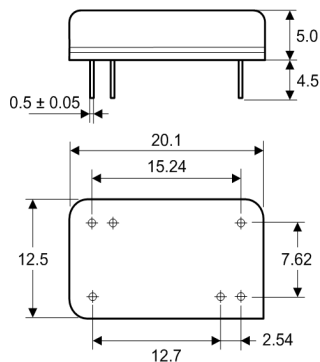

Matching Configuration

