
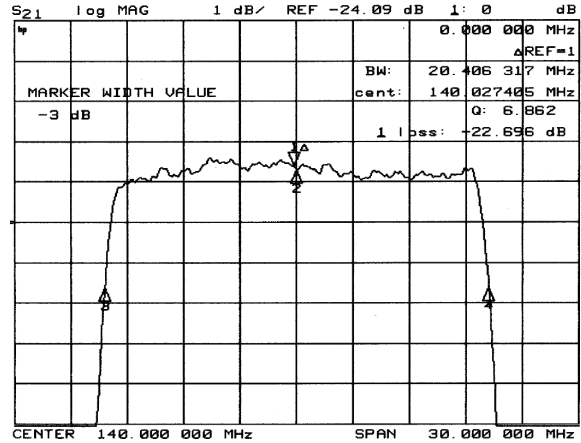



Typical Performance

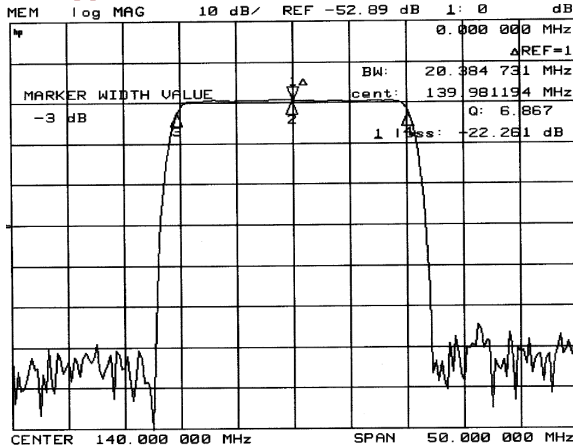

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	139.85	140.00	140.15
Insertion Loss	dB	-	22.5	24.0
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	20.00	20.30	-
40 dB Bandwidth	MHz	-	23.85	24.00
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	70	120
Absolute Delay	µsec	-	1.35	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

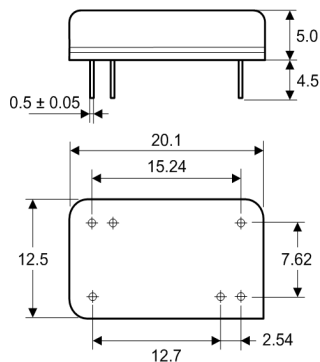

Matching Configuration

