
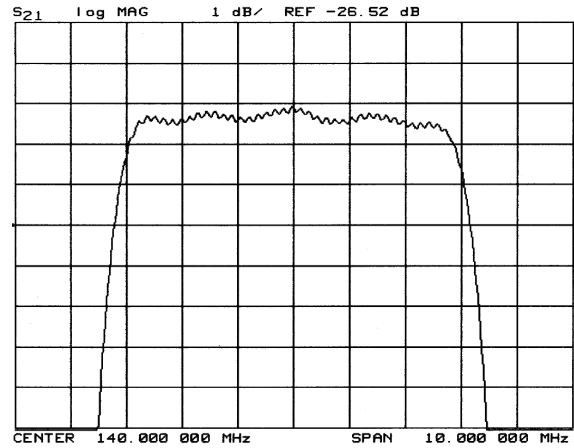



Typical Performance

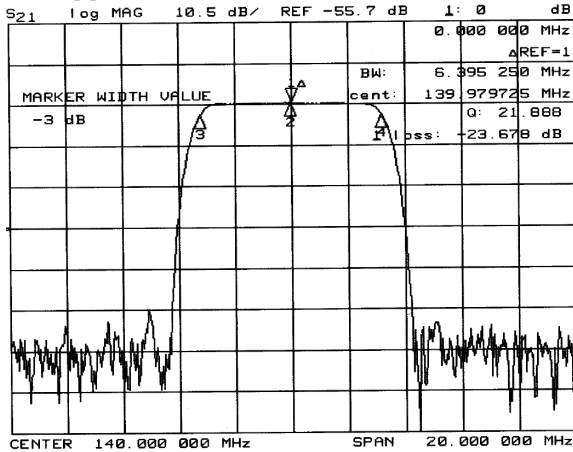

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	139.85	140.00	140.15
Insertion Loss	dB	-	24.0	25.5
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	6.20	6.40	-
40 dB Bandwidth	MHz	-	8.15	8.30
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	μsec	-	3.32	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

Package Dimension

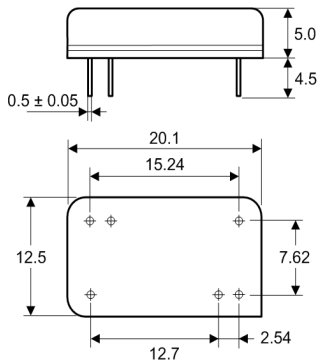

Matching Configuration

