
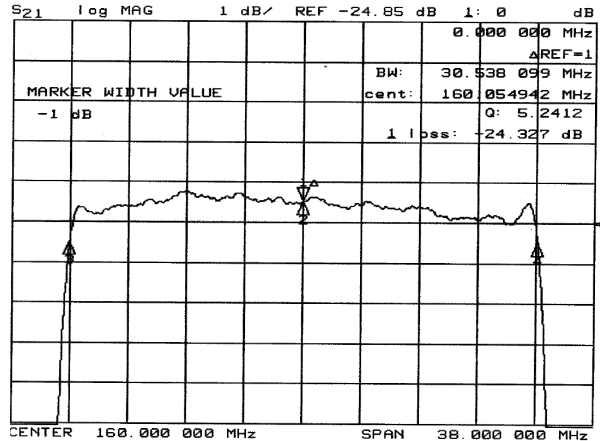



Typical Performance

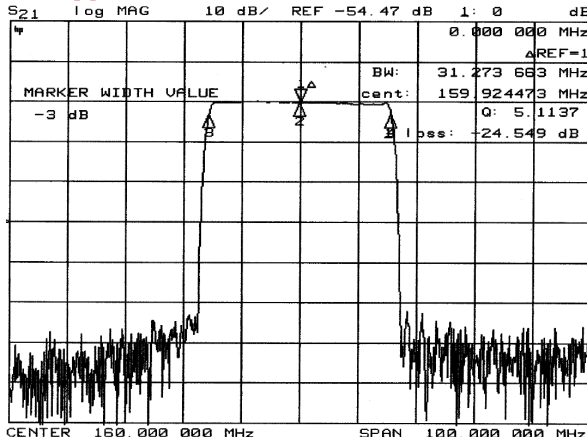

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	159.80	160.00	160.20
Insertion Loss	dB	-	24.5	26.0
1 dB Bandwidth	MHz	30.20	30.53	-
3 dB Bandwidth	MHz	31.00	31.27	-
40 dB Bandwidth	MHz	-	34.30	34.60
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	30	50
Absolute Delay	µsec	-	1.10	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

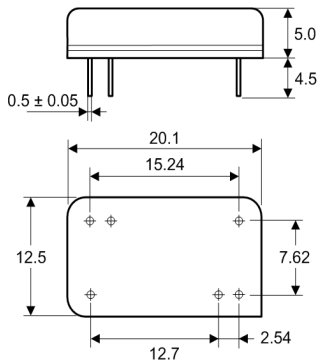

Matching Configuration

