
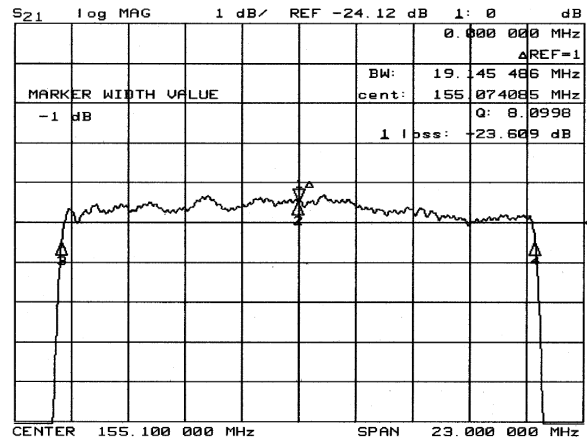



Typical Performance

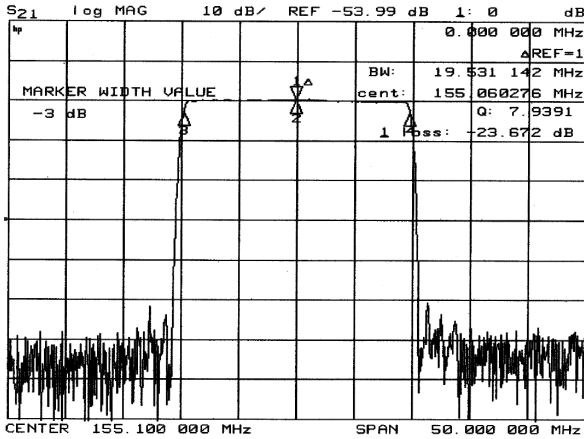

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	155.00	155.10	155.20
Insertion Loss	dB	-	23.5	25.0
1 dB Bandwidth	MHz	18.90	19.15	-
3 dB Bandwidth	MHz	19.40	19.55	-
40 dB Bandwidth	MHz	-	21.20	21.40
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	70	150
Absolute Delay	µsec	-	2.12	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

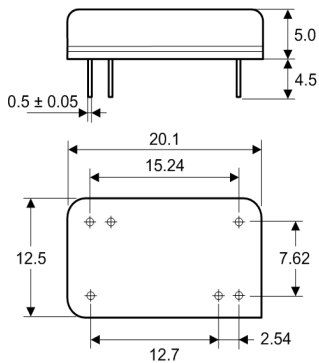

Matching Configuration

