
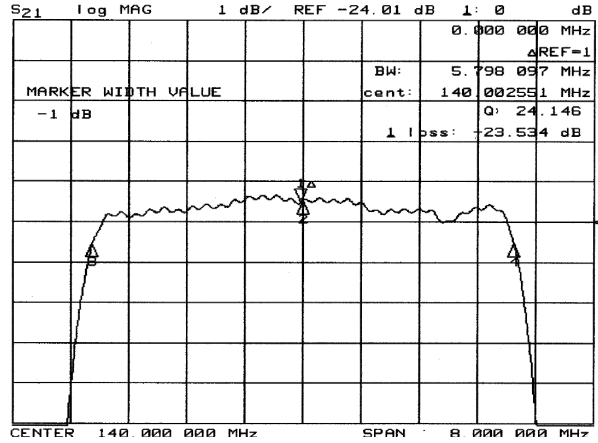



Typical Performance

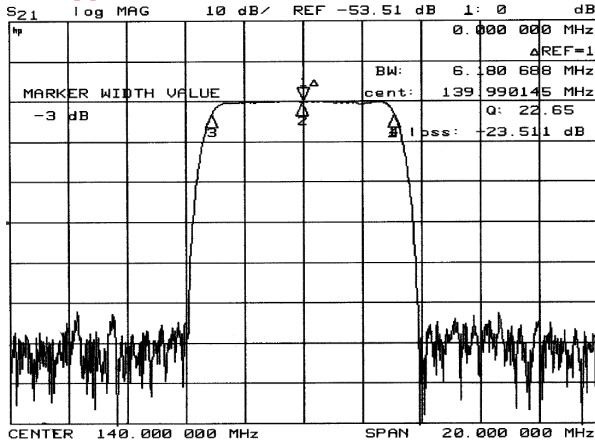

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	139.80	140.00	140.20
Insertion Loss	dB	-	23.5	25.0
1 dB Bandwidth	MHz	5.50	5.78	-
3 dB Bandwidth	MHz	6.00	6.18	-
40 dB Bandwidth	MHz	-	7.65	8.00
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	80	150
Absolute Delay	µsec	-	2.58	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

Package Dimension

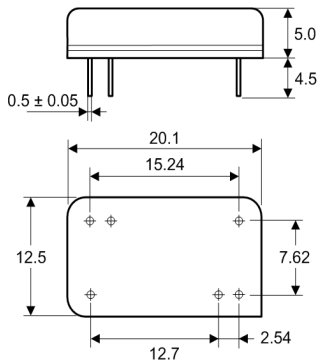

Matching Configuration

