
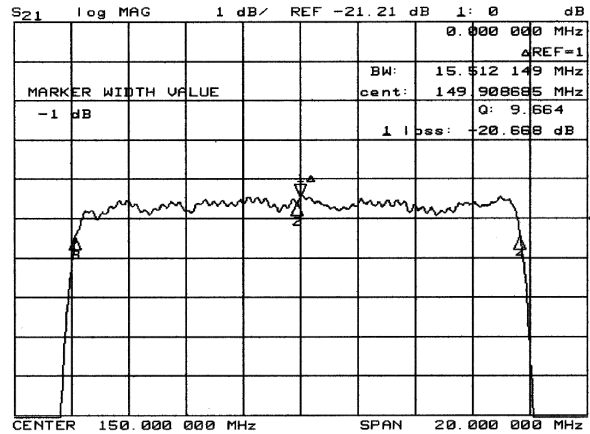



Typical Performance

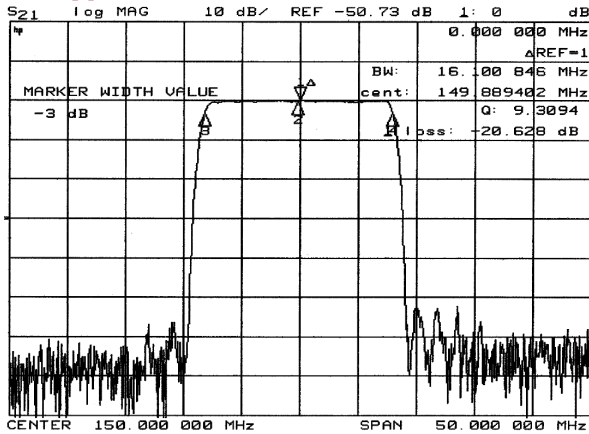

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	149.80	150.00	150.20
Insertion Loss	dB	-	20.5	22.0
1 dB Bandwidth	MHz	15.35	15.50	-
3 dB Bandwidth	MHz	16.00	16.10	-
40 dB Bandwidth	MHz	-	18.30	18.60
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	µsec	-	1.66	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

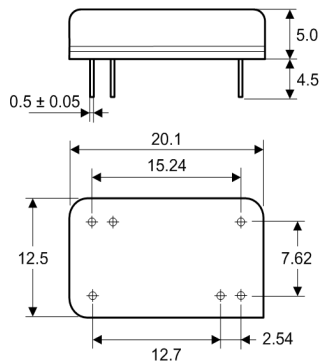

Matching Configuration

