
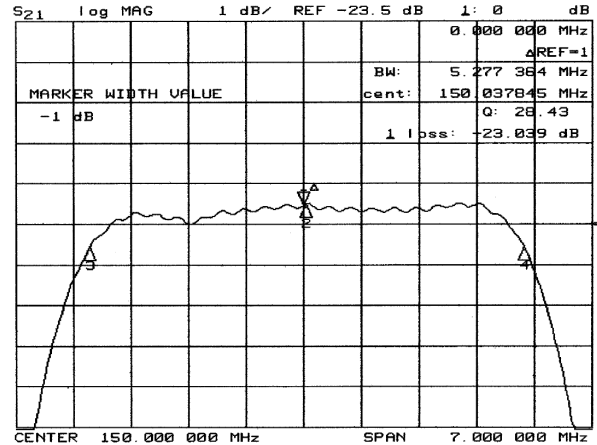



Typical Performance

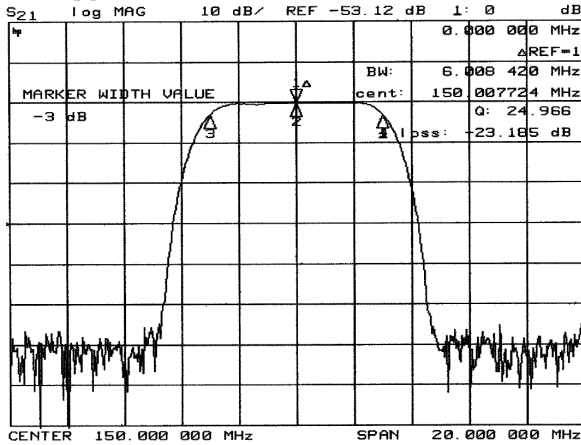

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	149.80	150.00	150.20
Insertion Loss	dB	-	24.0	25.5
1 dB Bandwidth	MHz	5.00	5.28	-
3 dB Bandwidth	MHz	5.80	6.00	-
40 dB Bandwidth	MHz	-	8.85	9.00
Passband Ripple	dB	-	0.55	0.80
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	1.90	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

Package Dimension

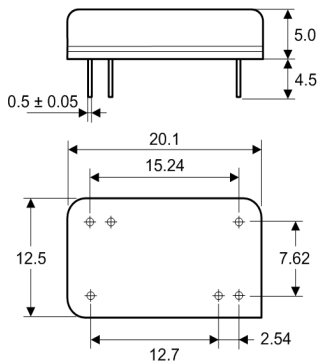

Matching Configuration

