
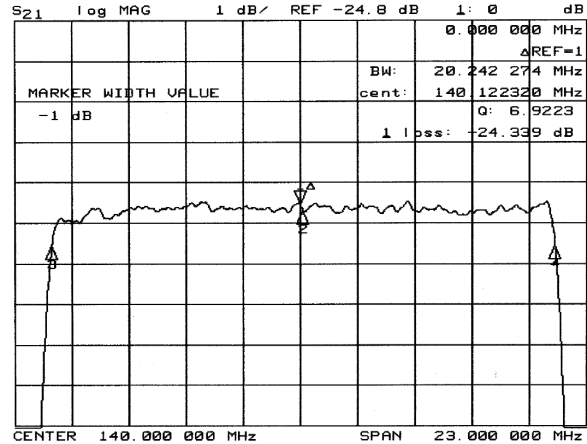



Typical Performance

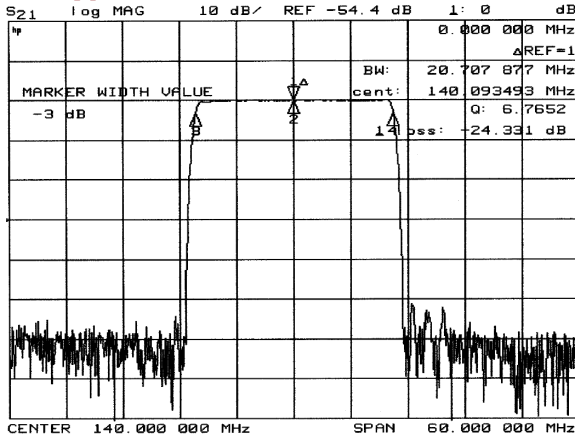

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	139.80	140.00	140.20
Insertion Loss	dB	-	24.5	26.0
1 dB Bandwidth	MHz	20.00	20.24	-
3 dB Bandwidth	MHz	20.50	20.70	-
40 dB Bandwidth	MHz	-	22.63	22.90
Passband Ripple	dB	-	0.55	0.80
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	1.63	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

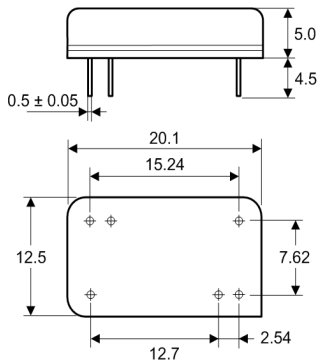

Matching Configuration

