



Typical Performance

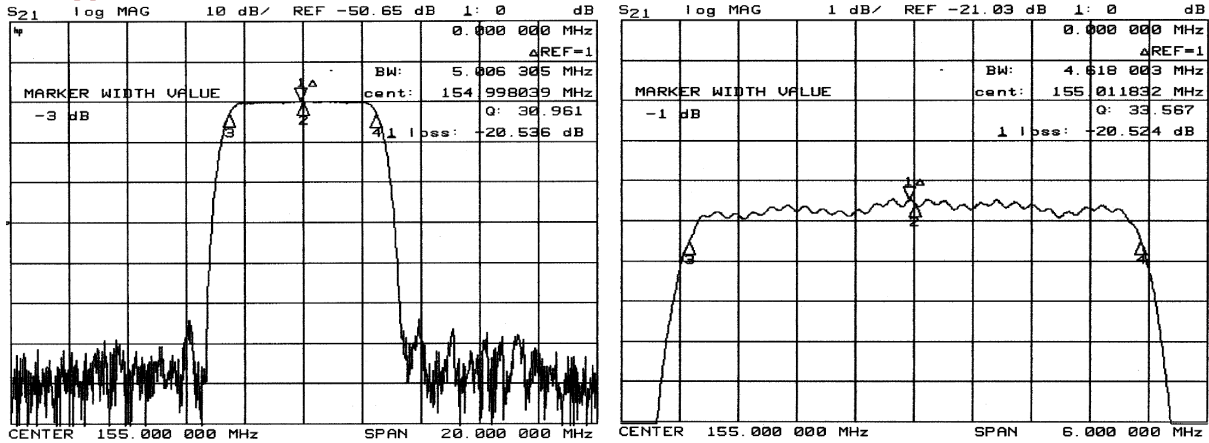

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	154.85	155.00	155.15
Insertion Loss	dB	-	20.5	22.0
1 dB Bandwidth	MHz	4.50	4.61	-
3 dB Bandwidth	MHz	4.95	5.00	-
40 dB Bandwidth	MHz	-	6.39	6.50
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	µsec	-	2.80	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

Package Dimension

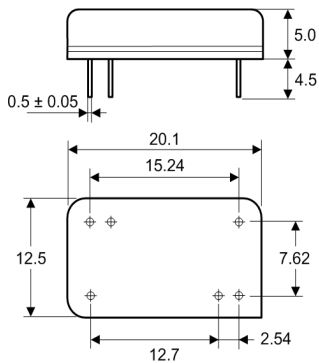

Matching Configuration

