
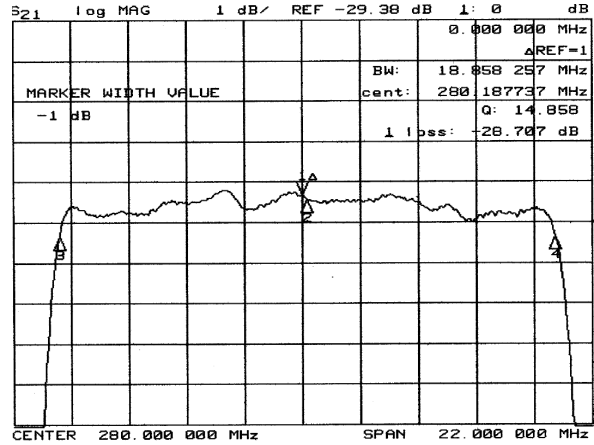



### Typical Performance

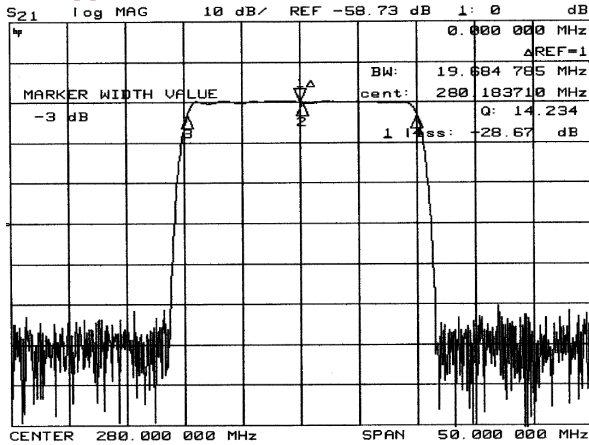

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	279.90	280.00	280.30
Insertion Loss	dB	-	28.5	30.0
1 dB Bandwidth	MHz	17.70	18.85	-
3 dB Bandwidth	MHz	19.50	19.46	-
40 dB Bandwidth	MHz	-	22.43	22.80
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	3.60	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

### Package Dimension

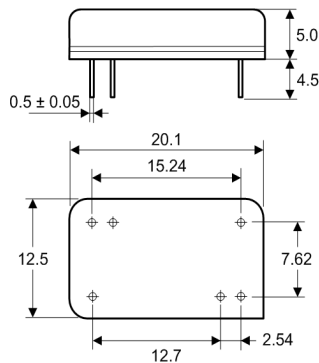

### Matching Configuration

