



Typical Performance

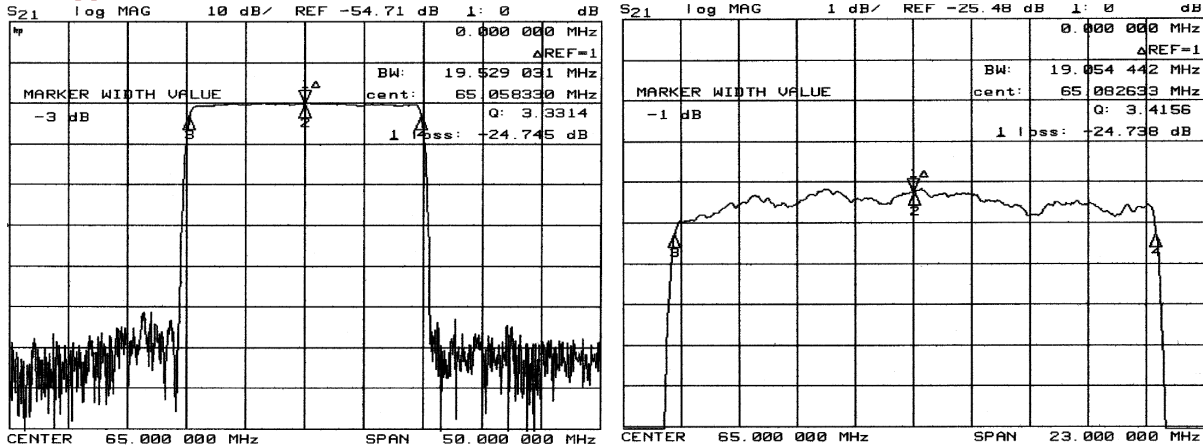


Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	64.92	65.00	65.08
Insertion Loss	dB	-	24.5	25.5
1 dB Bandwidth	MHz	18.90	190.50	-
3 dB Bandwidth	MHz	19.45	19.52	-
40 dB Bandwidth	MHz	-	21.15	21.30
Passband Ripple	dB	-	0.85	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	µsec	-	2.20	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

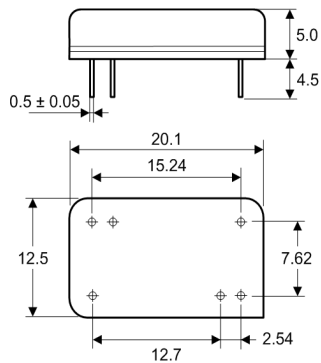

Matching Configuration

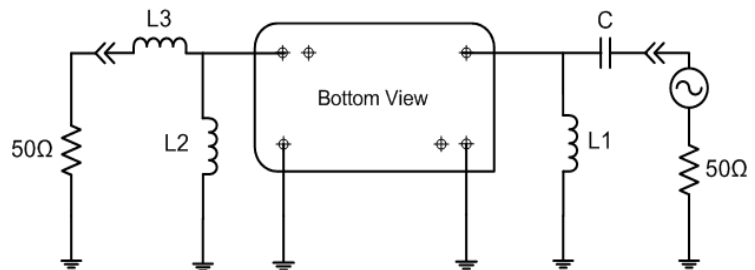

L1=154.7nH, L2=820nH, L3=820nH, C=36pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C