
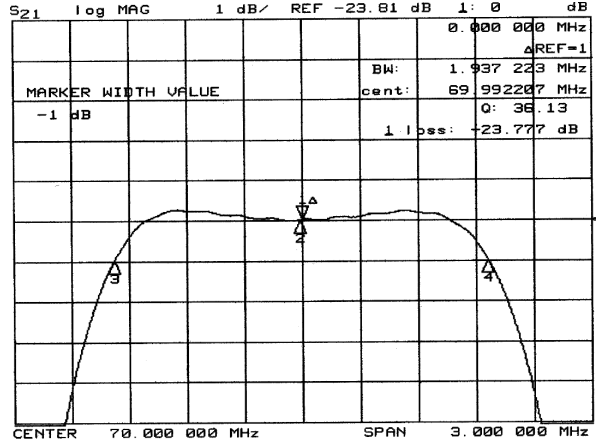



Typical Performance

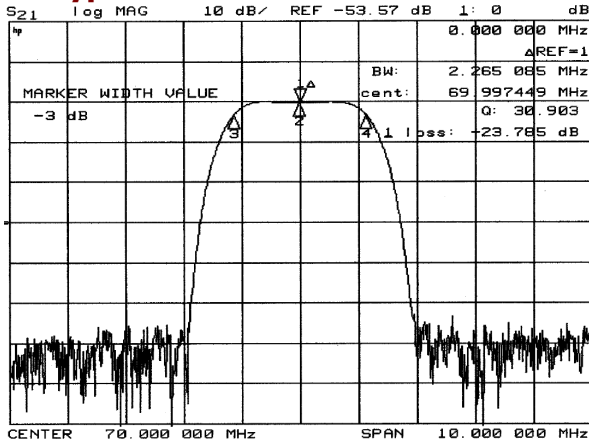

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	23.5	25.0
1 dB Bandwidth	MHz	1.80	1.94	-
3 dB Bandwidth	MHz	2.00	2.26	-
40 dB Bandwidth	MHz	-	3.62	3.80
Passband Ripple	dB	-	0.45	0.80
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	2.90	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	20		

Package Dimension

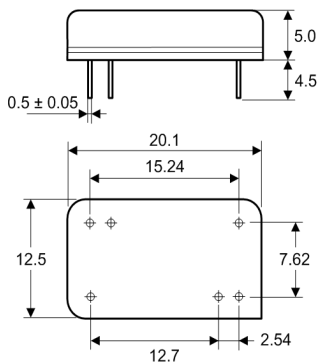

Matching Configuration

