
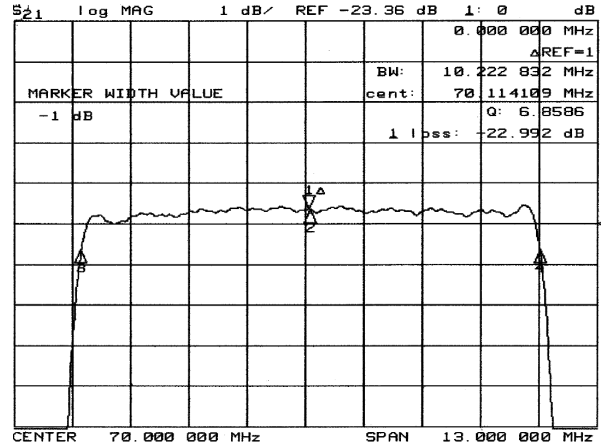



Typical Performance

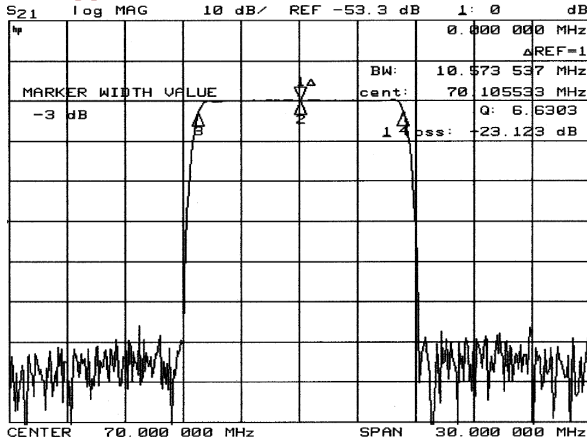

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	23.0	24.5
1 dB Bandwidth	MHz	10.10	10.22	-
3 dB Bandwidth	MHz	10.50	10.57	-
40 dB Bandwidth	MHz	-	11.95	12.10
Passband Ripple	dB	-	0.45	0.80
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	2.25	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

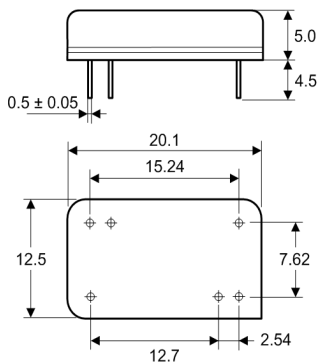

Matching Configuration

