
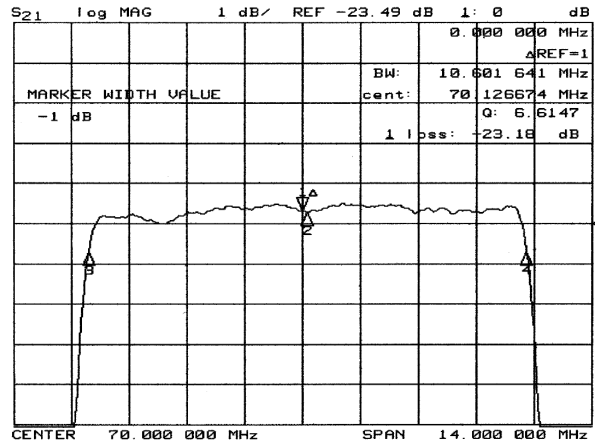



### Typical Performance

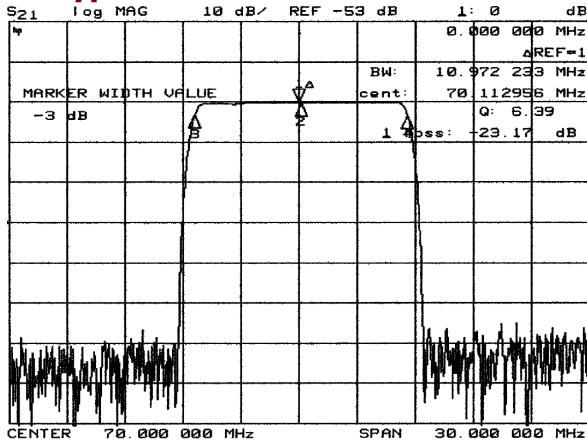

### Specification

| Index                   | Unit   | Min        | Typical | Max   |
|-------------------------|--------|------------|---------|-------|
| Center Frequency        | MHz    | 69.92      | 70.00   | 70.08 |
| Insertion Loss          | dB     | -          | 23.0    | 24.5  |
| 1 dB Bandwidth          | MHz    | 10.45      | 10.60   | -     |
| 3 dB Bandwidth          | MHz    | 10.80      | 10.95   | -     |
| 40 dB Bandwidth         | MHz    | -          | 12.43   | 12.60 |
| Passband Ripple         | dB     | -          | 0.55    | 0.80  |
| Group Delay Variation   | nsec   | -          | 50      | 100   |
| Absolute Delay          | µsec   | -          | 2.15    | -     |
| Ultimate Rejection      | dB     | 50         | 60      | -     |
| Substrate Material      | -      | 128-LiNbO3 |         |       |
| Temperature Coefficient | ppm/°C | -72        |         |       |
| Package                 | mm     | 20         |         |       |

### Package Dimension

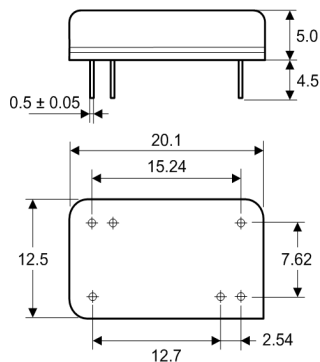

### Matching Configuration

