
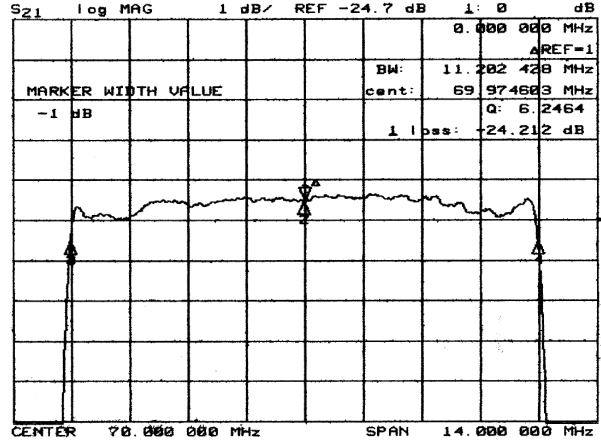



Typical Performance

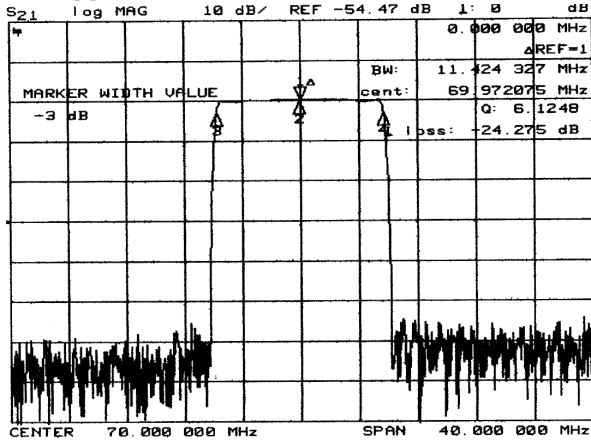

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	24.5	25.5
1 dB Bandwidth	MHz	11.00	11.20	-
3 dB Bandwidth	MHz	11.30	11.40	-
40 dB Bandwidth	MHz	-	12.40	12.55
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	μsec	-	3.33	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	35		

Package Dimension

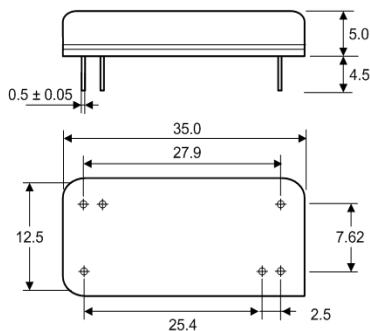

Matching Configuration

