
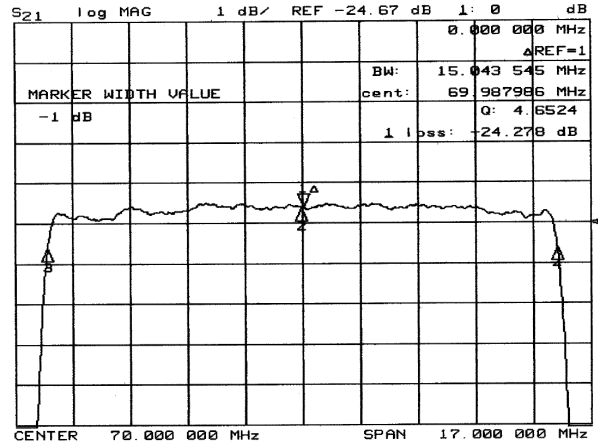



### Typical Performance

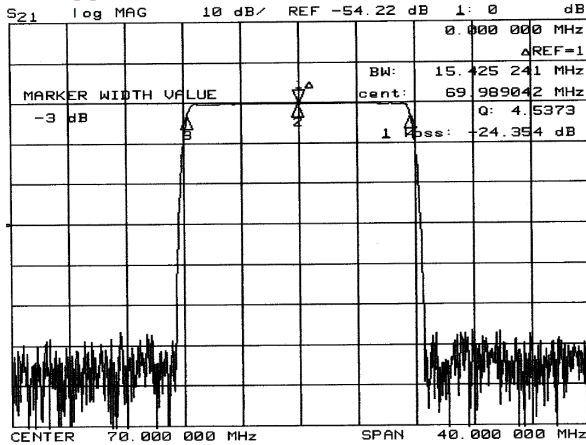

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	24.5	26.0
1 dB Bandwidth	MHz	14.80	15.04	-
3 dB Bandwidth	MHz	15.30	15.42	-
40 dB Bandwidth	MHz	-	16.92	17.20
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	2.27	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	35		

### Package Dimension

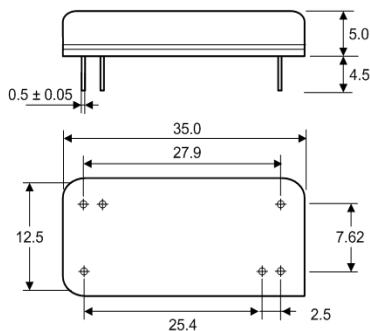

### Matching Configuration

