



### Typical Performance

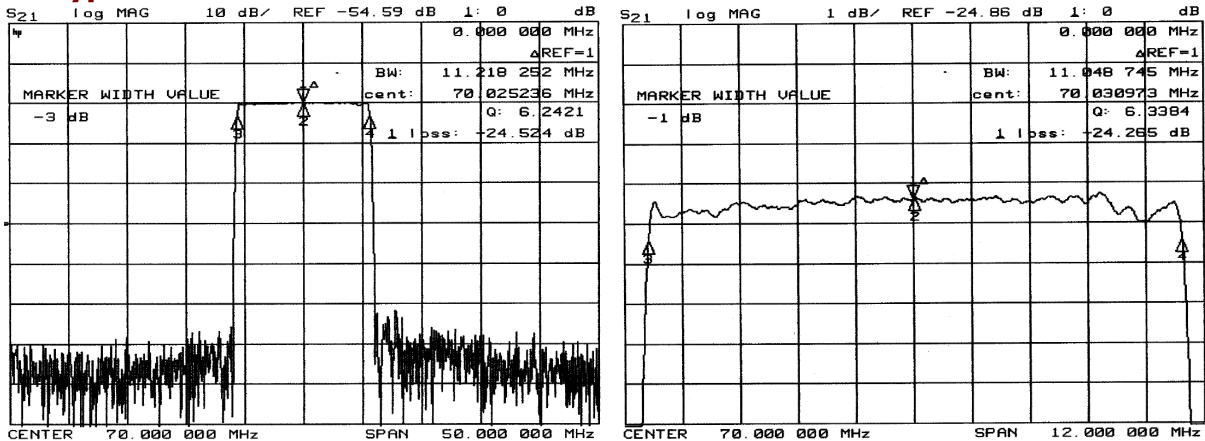

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	24.5	26.0
1 dB Bandwidth	MHz	11.00	11.05	-
3 dB Bandwidth	MHz	11.20	11.22	-
40 dB Bandwidth	MHz	-	11.91	12.10
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	70	120
Absolute Delay	µsec	-	4.20	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	38		

### Package Dimension

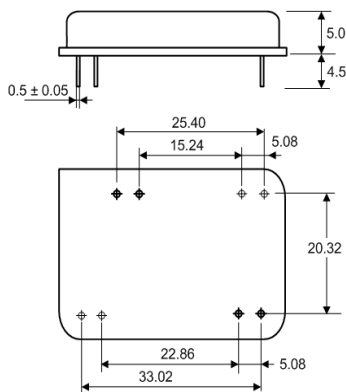

### Matching Configuration

