
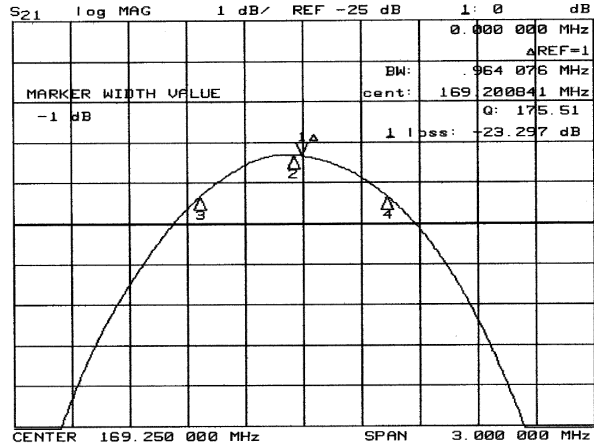



### Typical Performance

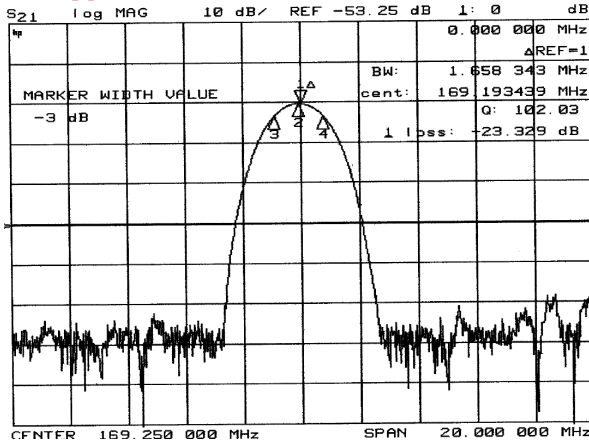

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	169.05	169.25	169.45
Insertion Loss	dB	-	23.5	25.0
1 dB Bandwidth	MHz	0.80	0.95	-
3 dB Bandwidth	MHz	1.50	1.65	-
40 dB Bandwidth	MHz	-	4.82	5.00
Passband Ripple	dB	-	0.50	1.00
Group Delay Variation	nsec	-	80	150
Absolute Delay	µsec	-	1.00	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	Quartz		
Temperature Coefficient	ppm/°C	-0.03		
Package	mm	13.3 x 6.5 x 2.0		

### Package Dimension

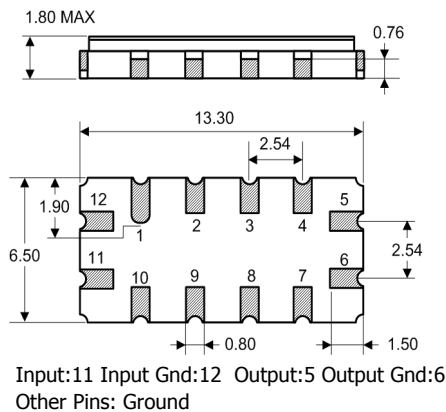

### Matching Configuration

