
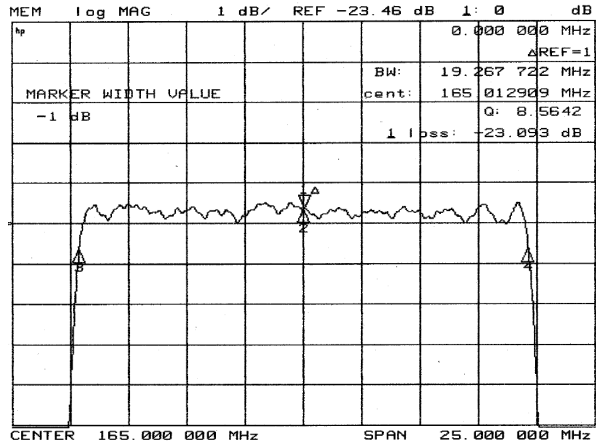



### Typical Performance

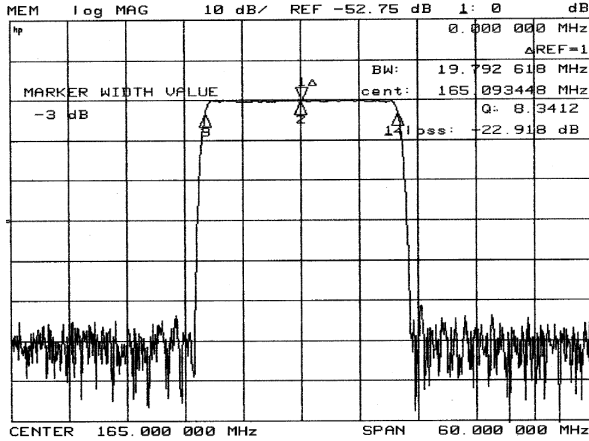

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	164.80	165.00	165.20
Insertion Loss	dB	-	23.0	24.5
1 dB Bandwidth	MHz	19.10	16.26	-
3 dB Bandwidth	MHz	19.60	19.79	-
40 dB Bandwidth	MHz	-	21.85	22.00
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	1.40	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	13.3 x 6.5 x 2.0		

### Package Dimension

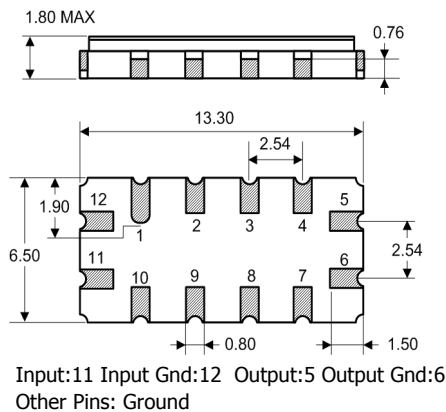

### Matching Configuration

