
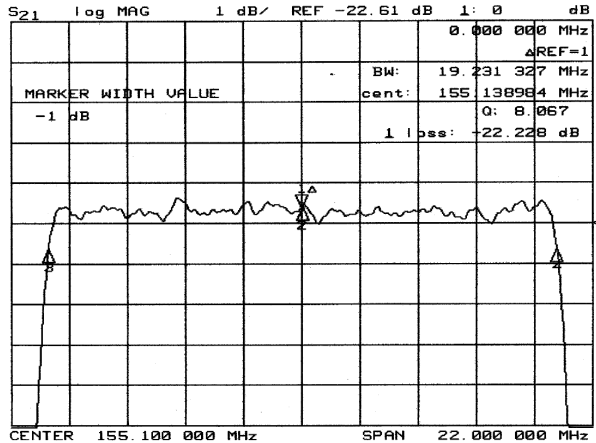



Typical Performance

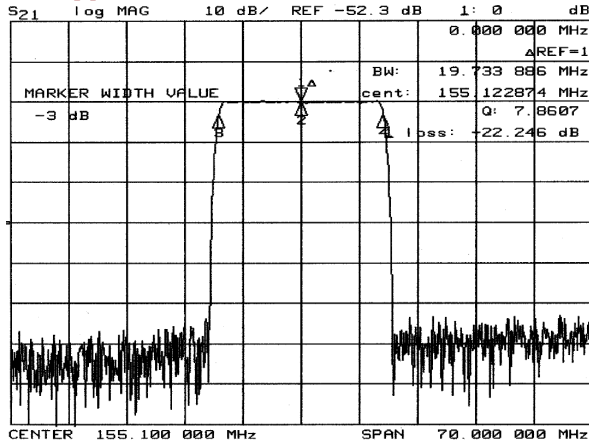

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	154.80	155.00	155.20
Insertion Loss	dB	-	22.5	24.0
1 dB Bandwidth	MHz	19.10	19.23	-
3 dB Bandwidth	MHz	19.60	19.73	-
40 dB Bandwidth	MHz	-	21.74	22.00
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	1.40	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	13.3 x 6.5 x 2.0		

Package Dimension

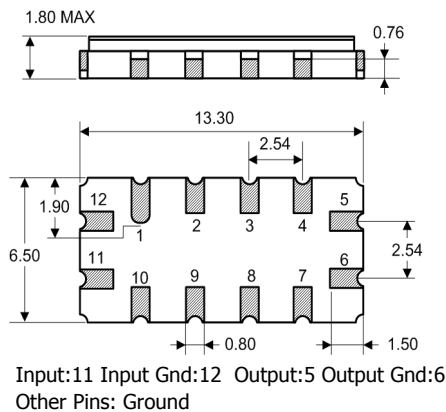

Matching Configuration

