
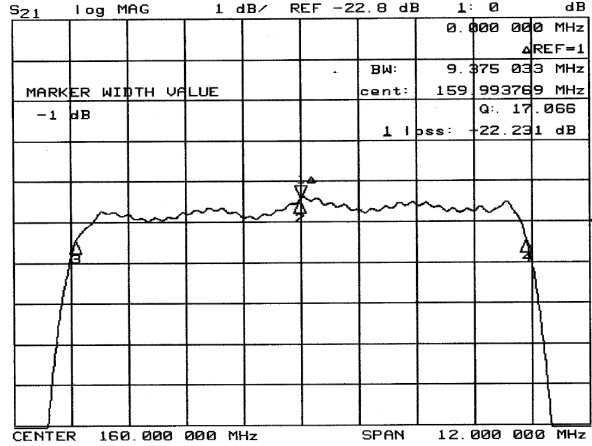



Typical Performance

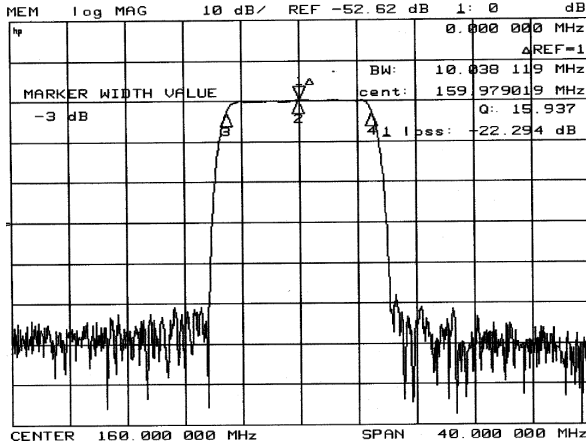

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	159.80	160.00	160.20
Insertion Loss	dB	-	22.5	23.5
1 dB Bandwidth	MHz	9.20	9.37	-
3 dB Bandwidth	MHz	9.90	10.00	-
40 dB Bandwidth	MHz	-	12.27	12.50
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	μsec	-	1.80	-
Ultimate Rejection	dB	45	50	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-20		
Package	mm	13.3 x 6.5 x 2.0		

Package Dimension

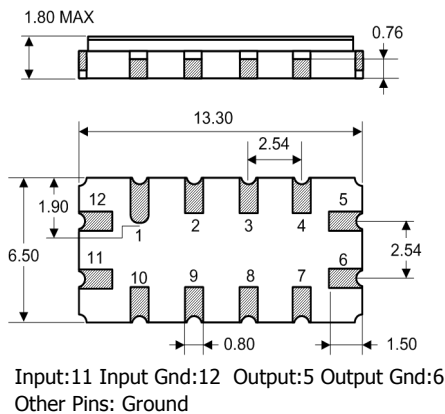

Matching Configuration

