
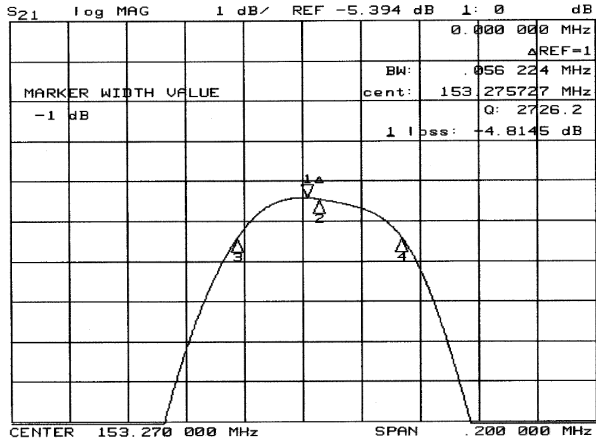



### Typical Performance

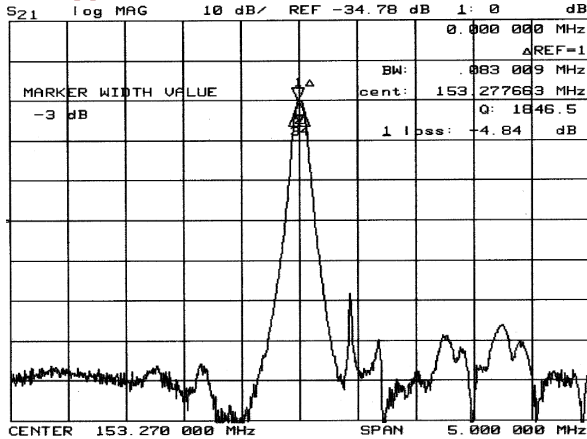

### Specification

| Index                   | Unit   | Min              | Typical | Max    |
|-------------------------|--------|------------------|---------|--------|
| Center Frequency        | MHz    | 153.20           | 153.30  | 153.40 |
| Insertion Loss          | dB     | -                | 5.0     | 6.0    |
| 1 dB Bandwidth          | MHz    | 0.04             | 0.056   | -      |
| 3 dB Bandwidth          | MHz    | 0.06             | 0.083   | -      |
| 40 dB Bandwidth         | MHz    | -                | -       | -      |
| Passband Ripple         | dB     | -                | 0.65    | 1.00   |
| Group Delay Variation   | nsec   | -                | -       | -      |
| Absolute Delay          | μsec   | -                | 8.50    | -      |
| Ultimate Rejection      | dB     | 50               | 60      | -      |
| Substrate Material      | -      | Quartz           |         |        |
| Temperature Coefficient | ppm/°C | -0.03            |         |        |
| Package                 | mm     | 13.3 x 6.5 x 2.0 |         |        |

### Package Dimension

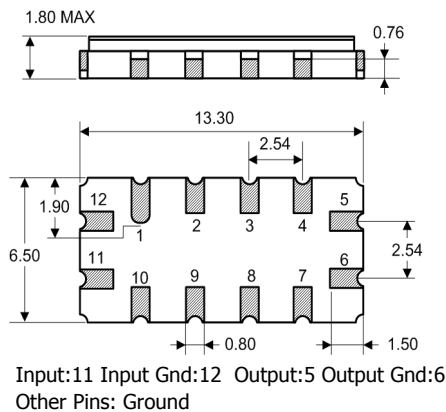

### Matching Configuration

