
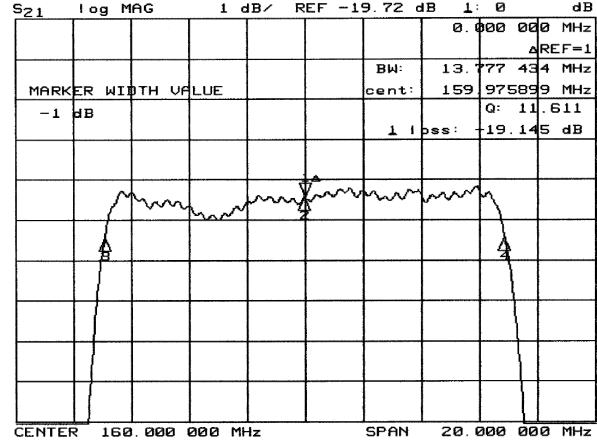



Typical Performance

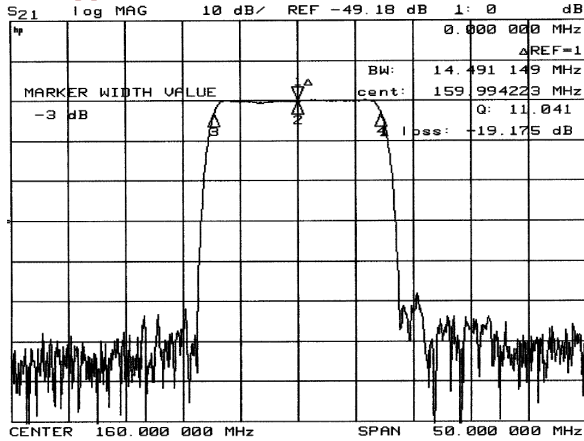

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	159.80	160.00	160.20
Insertion Loss	dB	-	19.5	21.5
1 dB Bandwidth	MHz	13.70	13.80	-
3 dB Bandwidth	MHz	14.00	14.50	-
40 dB Bandwidth	MHz	-	17.24	27.40
Passband Ripple	dB	-	-	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	1.30	-
Ultimate Rejection	dB	특별	특별	-
Substrate Material	-	YZ-LiNbO3		
Temperature Coefficient	ppm/°C	-94		
Package	mm	13.3 x 6.5 x 2.0		

Package Dimension

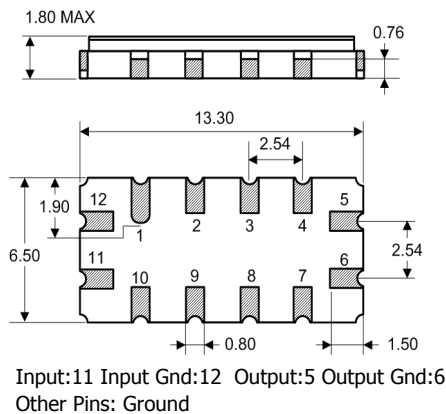

Matching Configuration

