
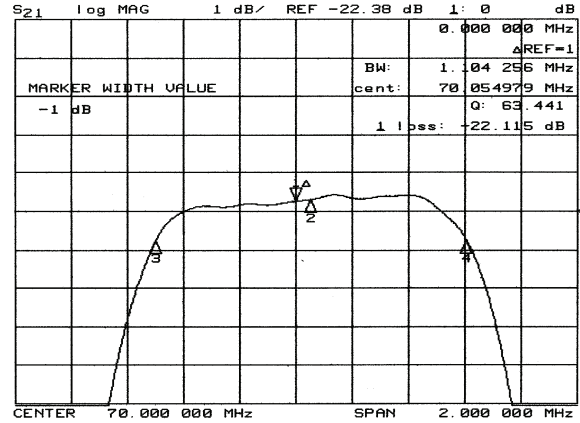


● Typical Performance

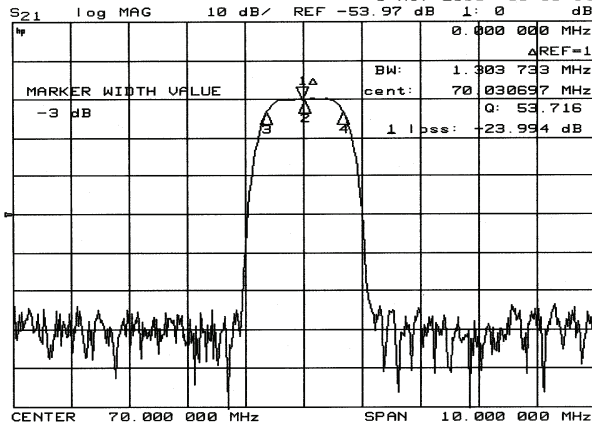

● Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	24	25
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	1.25	1.3	-
40 dB Bandwidth	MHz	-	2.05	2.15
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	150	300
Absolute Delay	μsec	-	3.22	-
Ultimate Attenuation	dB	50	55	-
Substrate Material		128-LiNbO ₃		
Temperature Coefficient	ppm/°C	-72		
Package	mm	0		

● Package Dimension

● Matching Configuration

No Matching Required
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C