
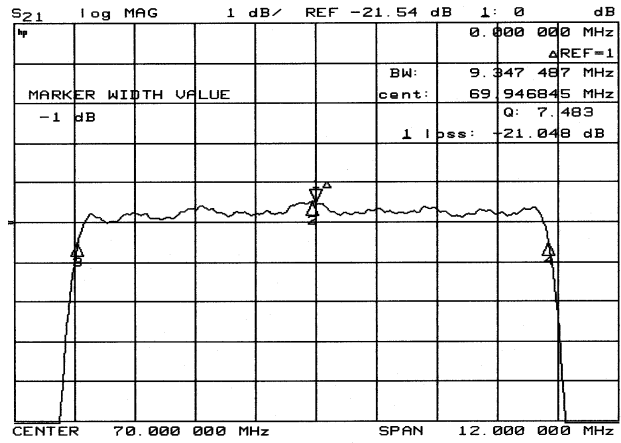



### ● Typical Performance

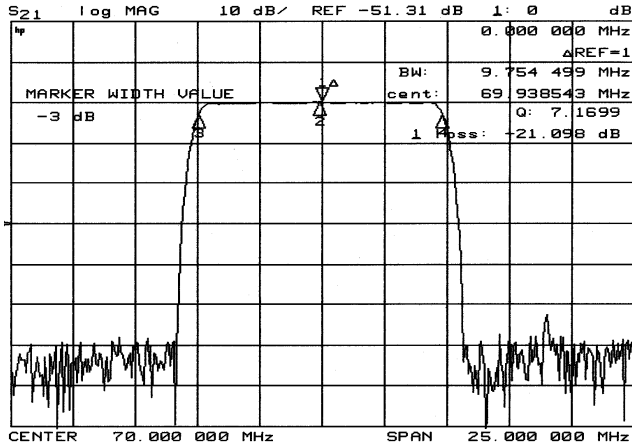

### ● Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	21	22.5
1 dB Bandwidth	MHz	9.2	9.35	-
3 dB Bandwidth	MHz	9.6	9.75	-
40 dB Bandwidth	MHz	-	11.25	11.4
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	70	120
Absolute Delay	μsec	-	2.3	-
Ultimate Attenuation	dB	50	60	-
Substrate Material		128- LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	-		

### ● Package Dimension

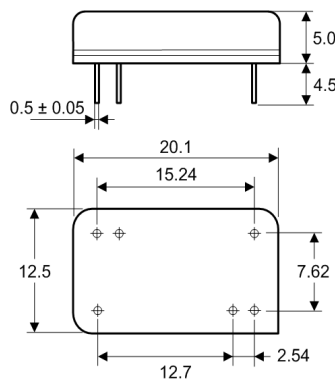

### ● Matching Configuration

