
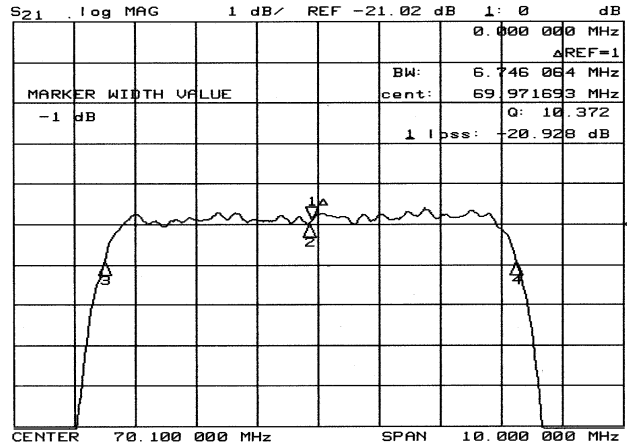



Typical Performance

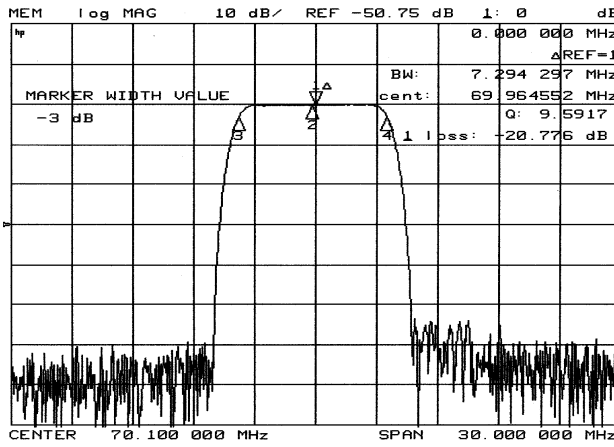


Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	21	22.5
1 dB Bandwidth	MHz	6.5	6.75	-
3 dB Bandwidth	MHz	7	7.25	-
40 dB Bandwidth	MHz	-	9.45	9.7
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	80	120
Absolute Delay	μsec	-	1.9	-
Ultimate Attenuation	dB	50	60	-
Substrate Material		YZ-LiNbO3		
Temperature Coefficient	ppm/°C	-94		
Package	mm	-		

Package Dimension

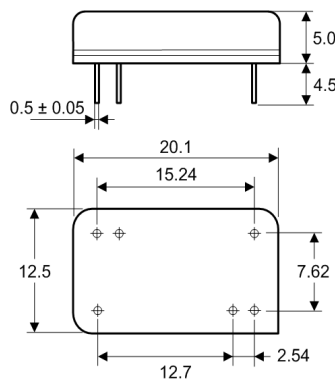

Matching Configuration

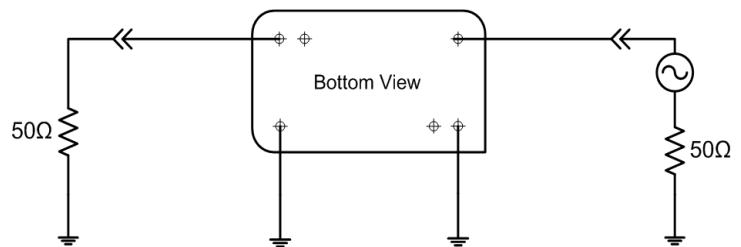

No Matching Required
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C