
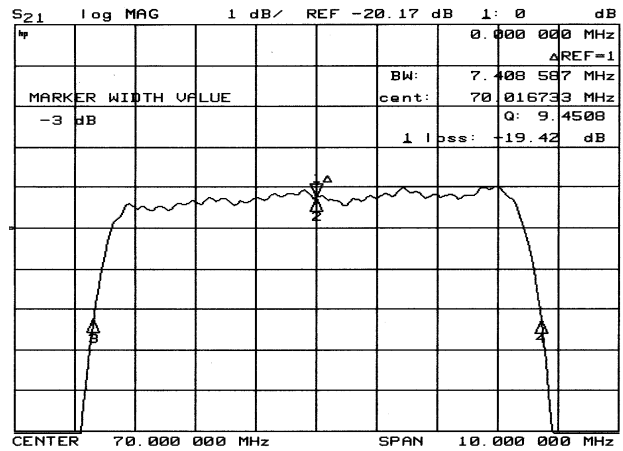



● Typical Performance

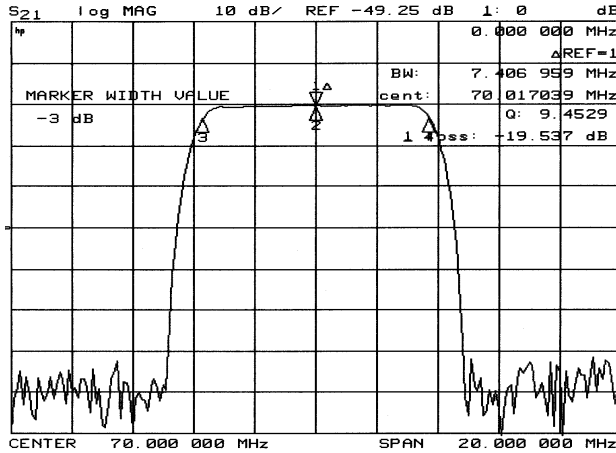


● Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	19.5	21.5
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	7.2	7.4	-
40 dB Bandwidth	MHz	-	9.3	9.5
Passband Ripple	dB	-	0.7	1
Group Delay Variation	nsec	-	70	100
Absolute Delay	µsec	-	1.8	-
Ultimate Attenuation	dB	50	60	-
Substrate Material		128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	-		

● Package Dimension

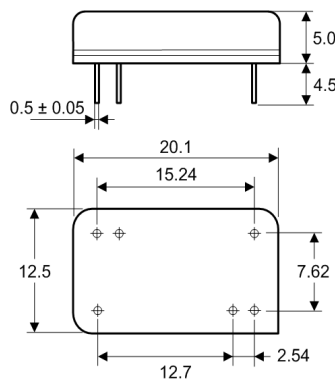

● Matching Configuration

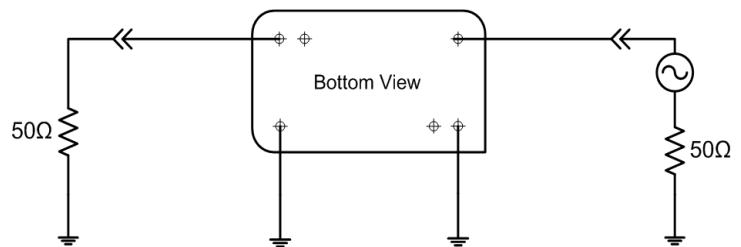

No Matching Required
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C