
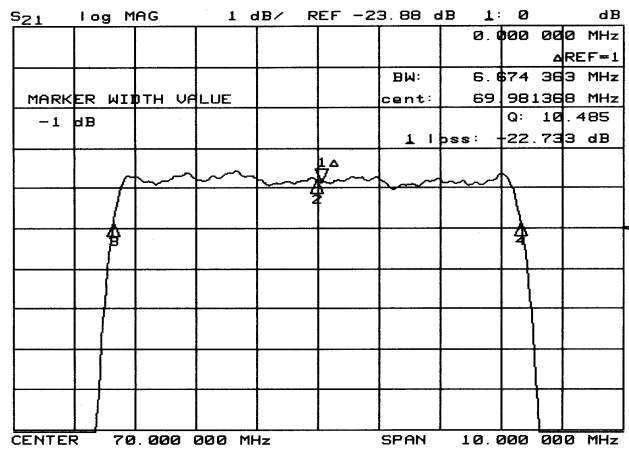



● Typical Performance

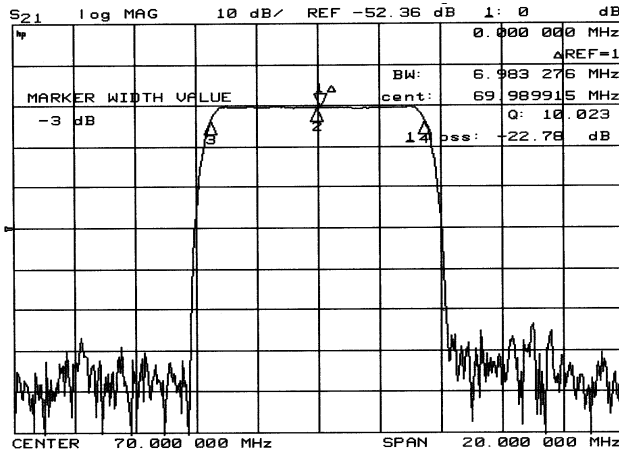

● Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	22.5	24
1 dB Bandwidth	MHz	6.4	6.65	-
3 dB Bandwidth	MHz	6.9	7	-
40 dB Bandwidth	MHz	-	8.25	8.5
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	2.45	-
Ultimate Attenuation	dB	50	60	-
Substrate Material		YZ-LiNbO3		
Temperature Coefficient	ppm/°C	-94		
Package	mm	-		

● Package Dimension

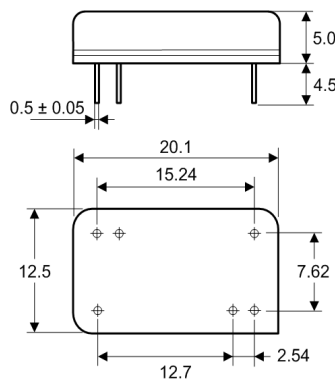

● Matching Configuration

