
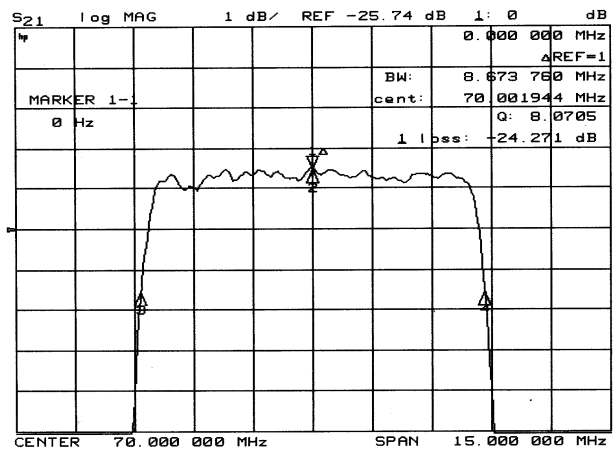



### ● Typical Performance

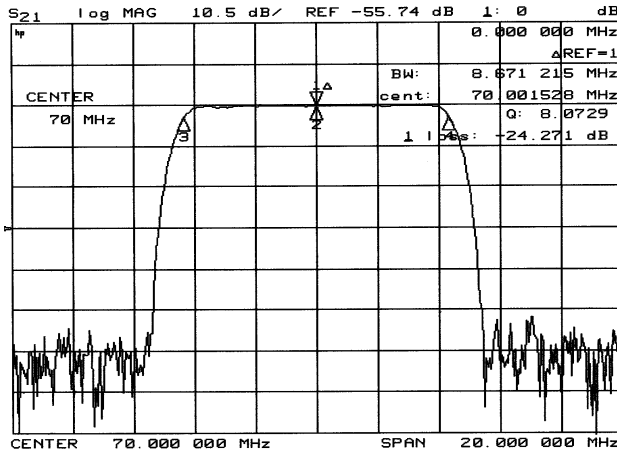


### ● Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	24	25.5
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	8.5	8.65	-
40 dB Bandwidth	MHz	-	10.55	10.7
Passband Ripple	dB	-	0.55	0.8
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	2.05	-
Ultimate Attenuation	dB	50	55	-
Substrate Material		YZ-LiNbO3		
Temperature Coefficient	ppm/°C	-94		
Package	mm	-		

### ● Package Dimension

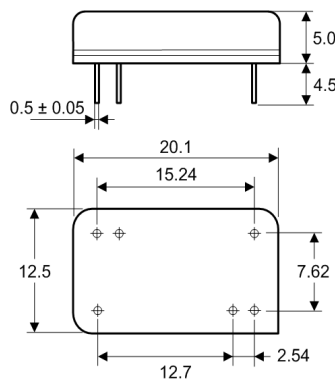

### ● Matching Configuration

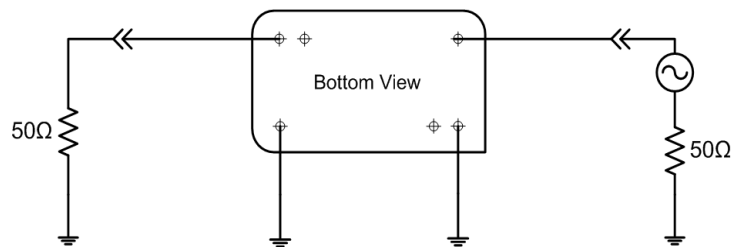

No Matching Required  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C