
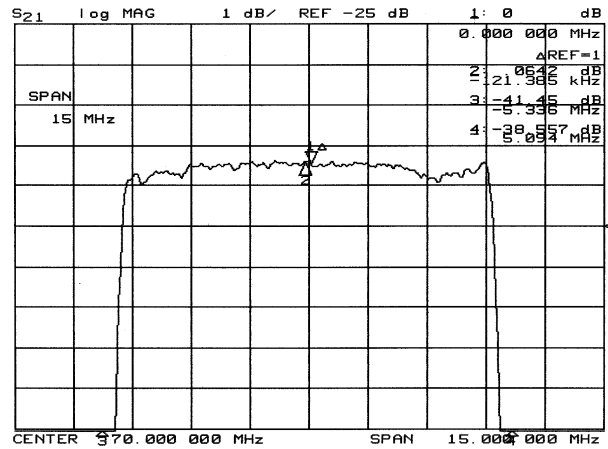



### Typical Performance

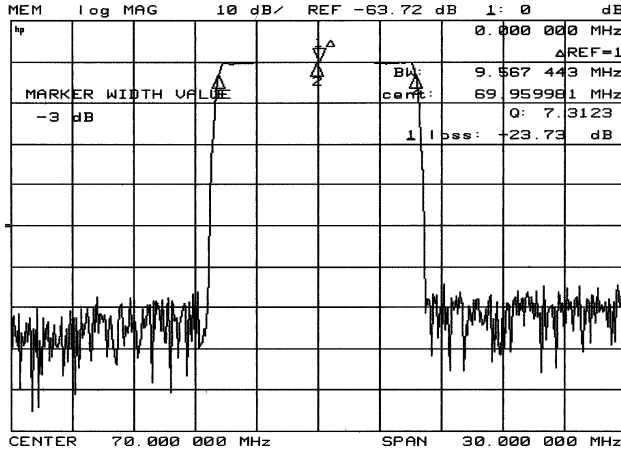


### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	23.5	25
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	9.5	9.55	-
40 dB Bandwidth	MHz	-	10.45	10.55
Passband Ripple	dB	-	0.55	1
Group Delay Variation	nsec	-	100	150
Absolute Delay	µsec	-	3.75	-
Ultimate Attenuation	dB	50	55	-
Substrate Material		128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	-		

### Package Dimension

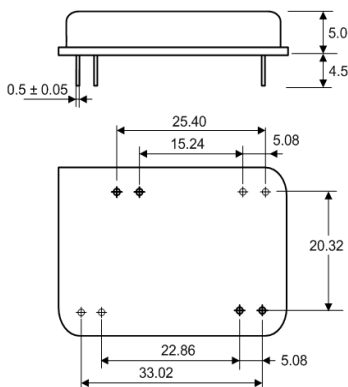

### Matching Configuration

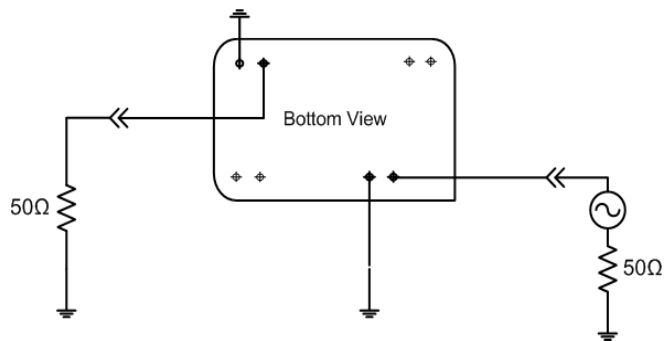

No Matching Required  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C