
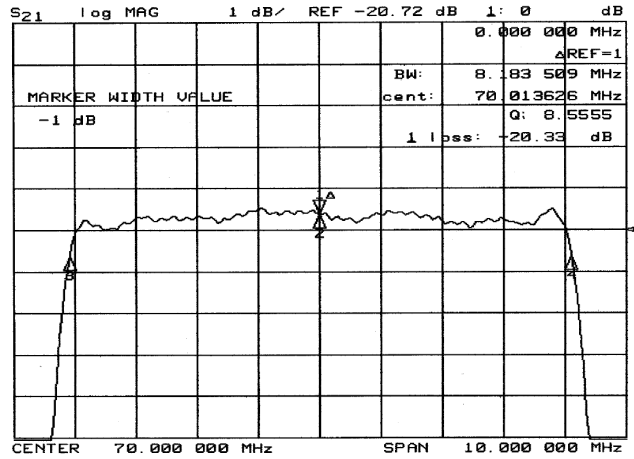



Typical Performance

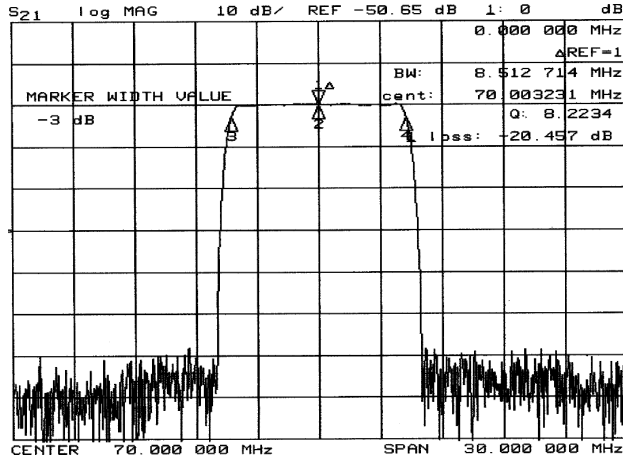


Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	20.5	22.0
1 dB Bandwidth	MHz	8.00	8.18	-
3 dB Bandwidth	MHz	8.40	8.50	-
40 dB Bandwidth	MHz	-	9.90	10.20
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	µsec	-	2.42	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	27		

Package Dimension

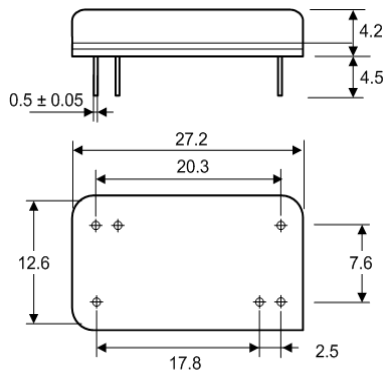

Matching Configuration

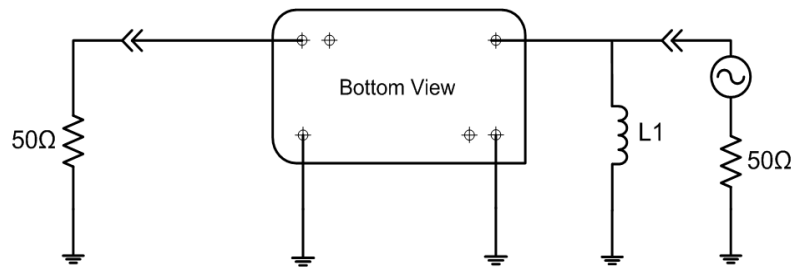

Source / Load Impedance = 50Ω
Ambient Temperature = 25°C