



● Typical Performance

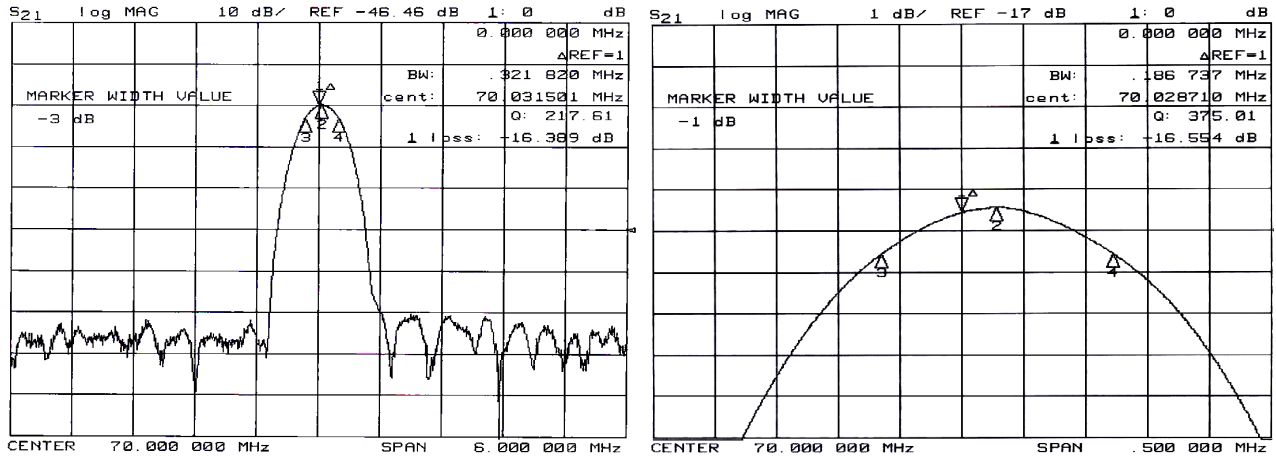

● Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.95	70.00	70.05
Insertion Loss	dB	-	16.5	19.0
1 dB Bandwidth	MHz	0.16	0.19	-
3 dB Bandwidth	MHz	0.25	0.32	-
40 dB Bandwidth	MHz	-	0.94	1.00
Passband Ripple	dB	-	0.10	0.50
Group Delay Variation	nsec	-	200	400
Absolute Delay	µsec	-	3.20	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	Quartz		
Temperature Coefficient	ppm/°C	-0.03		
Package	mm	27		

● Package Dimension

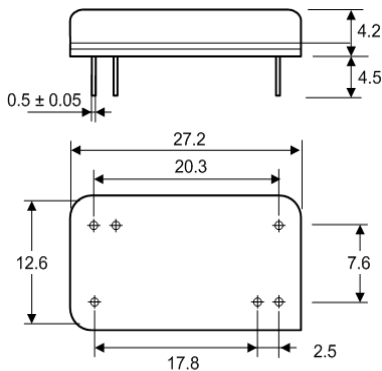

● Matching Configuration

